



# HS-NFA382

## NVR Network Video Recorder

- Plug & Play supported.
- Multi stream supported.
- Mobile remote surveillance. (iPhone/ iPad/ Android)
- 2 way audio. (conference)
- Recording retention function supported.
- USB or remote firmware upgrade supported.
- Support 16 CH simultaneous playback. 1 / 4 / 8 / 16 CH
- Network online user management.
- Multi-user online simultaneously.
- Recorded file protection supported.
- IE browser supported. (Windows)
- Support ONVIF / RTSP connection

**RoHS** **CE** **FC**





WITH CAMERA



\* Flip front panel.

## HS-NFA382

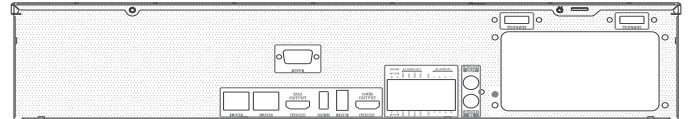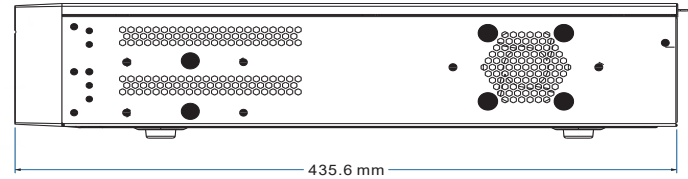

System	
Compression	H.265 / H.264
Operating System	Embedded Linux
Video	
Network Input	64 CH
Network Access Bandwidth	320 Mbps
Network Access Format	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P / 960H / D1 / CIF @25 / 30fps
Output	HDMI × 2 : HDMI 1: 4K / 2K / 1920 × 1080 / 1280 × 1024 HDMI 2: 1920 × 1080 / 1280 × 1024 VGA × 1: 1920 × 1080 / 1280 × 1024
Audio	
Network Input	64 CH
2-way Audio	RCA × 1
Local Output	RCA × 1
Record	
Record Stream	Dual / single stream recording
Mode	Manual / timer / motion / sensor
Playback	
Simultaneous Playback	Max 16 CH
Search	IVS / Date & Time search / Event search
Function	Play / pause / FF / REW / digital zoom
Alarm	
Mode	Manual / sensor / motion / exception
Alarm Input ( IPC )	64 CH
Alarm Input ( NVR )	8 CH
Alarm Output ( IPC )	64 CH
Alarm Output ( NVR )	4 CH
Triggering	Record / snap / preset / e-mail / APP push message

External Interface	
Network Interface	RJ45 10 / 100 / 1000 Mbps × 2
PoE Port	-
Serial Interface	RS485 × 2, (A,B for keyboard ;Z,Y for PTZ)
USB Interface	USB 2.0 × 2 ( one in the front panel and the other in the rear panel ) USB 3.0 × 1 ( rear panel )
Remote Controller	optional
Network	
Protocol	TCP / IP / PPPoE / DHCP / DNS / DDNS / UPnP / NTP / SMTP / RTSP / ONVIF
Network-Function	Support licensed CMS(100CH) / EMAP / IE
Web Client	Max 10 users online
Client Application	Display / Playback / Backup / DVR control / PTZ Control
Storage	
SATA	8
e-SATA	2
Capacity	max 10TB per HDD
RAID	0 / 1 / 5 / 6 / 10
Backup	
Local Backup	USB disk / USB mobile HDD ( limited )
Network Backup	Yes
Mobile Device	
Operating System	iOS / Andriod
Others	
Power Supply	ATX 250W
Consumption	≤ 15W ( without HDD )
Dimensions	435 × 456 × 99 ( W × D × H ) mm
Operating Temperature	-10 ~ 50 °C
Operating Humidity	10% ~ 90% humidity